

## PFS-v-20

### PRODUCT DESCRIPTION

- Aluminum Support System for Rainscreen Cladding

### ADVANTAGES / BENEFITS

- Spanning of Non-Load Bearing Areas
- Ease of Installation with Self Drilling Screws
- Adjustment in Vertical and Horizontal Planes
- Pre-assembly is Possible
- Designed for Thermal Expansion and Contraction
- All Components Designed for Maximum Corrosion Resistance

### INSTALLATION

- Subframe support systems have to be designed and installed according to valid specifications as well as national codes and regulations.




### TECHNICAL DETAILS

#### Horizontal Rails




Thickness: 2mm or 3mm  
 Depth: 30mm or 20mm  
 Perforated or non-perforated

#### Brackets

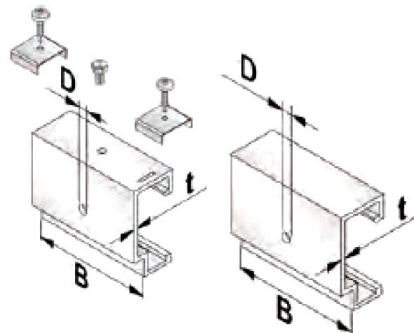

Thread-Ø: M6 or M8  
 Thickness: 2mm or 3mm  
 Adjustable or fix

#### Vertical Profiles

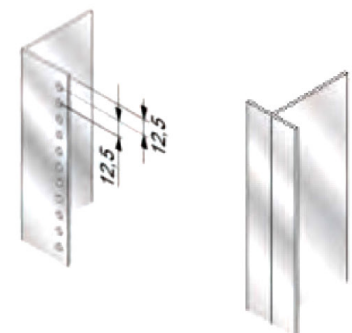

Length: 6.00m      Length: 6.00m  
 Aluminum, black anodized,  
 stainless steel

#### Wall Brackets



Fix Point

Sliding Point

Fix and Sliding Point

Available in lengths:  
 L = 40 / 60 / 80 / 100 / 120 / 140 /  
 160 / 180 / 200 / 220 / 240 /  
 260 / 280 / 300 / 320